

YORK®

ITALY
POMPA AIR BERKUALITAS & TERPERCAYA


Pompa Celup Sumur Dalam Submersible Deep Well Pump 3 SYK 1.8 - 2.5M³ (P)



SUBMERSIBLE DEEP WELL PUMP 3 SYK 1.8 / 2.5 (P)

YORK® ITALY
POMPA AIR BERKUALITAS & TERPERCAYA
www.york-jp.co.id

Title



Fitur

1. Hemat Listrik
2. Semburan Deras
3. Voltage 160V - 240V
4. Bebas Perawatan
5. Tidak Berisik

Componen & Material

Components	Material
Pump external casing	AISI 304 SS
Delivery casing	Cast-Cu ASTM C85500 @ AISI 304 SS
Suction lantern	Cast-Cu ASTM C85500 @ AISI 304 SS
Diffuser	Plastic PC
Impeller	Plastic POM
Shaft	@ AISI 316 SS @ AISI 304 SS
Shaft coupling	@ AISI 316 SS @ AISI 304 SS
Wear ring	AISI 304 SS & Ceramic
Motor external casing	AISI 304 SS
Top cover	Cast-Cu ASTM C85500
Bottom support	AISI 304 SS
Mechanical seal	Special seal for deep well (Graphite-Ceramic TC)
Shaft	AISI 303 SS-ASTM 1045 / S140
Bearing	NSK
Seal lubricant oil	Oil for food machinery and pharmaceutical use.

Aplikasi



Rumah Tangga



Semi Industri




Ligan Pertanian



Sistem Penediaan Air

Performance Chart at n=2850 1/min

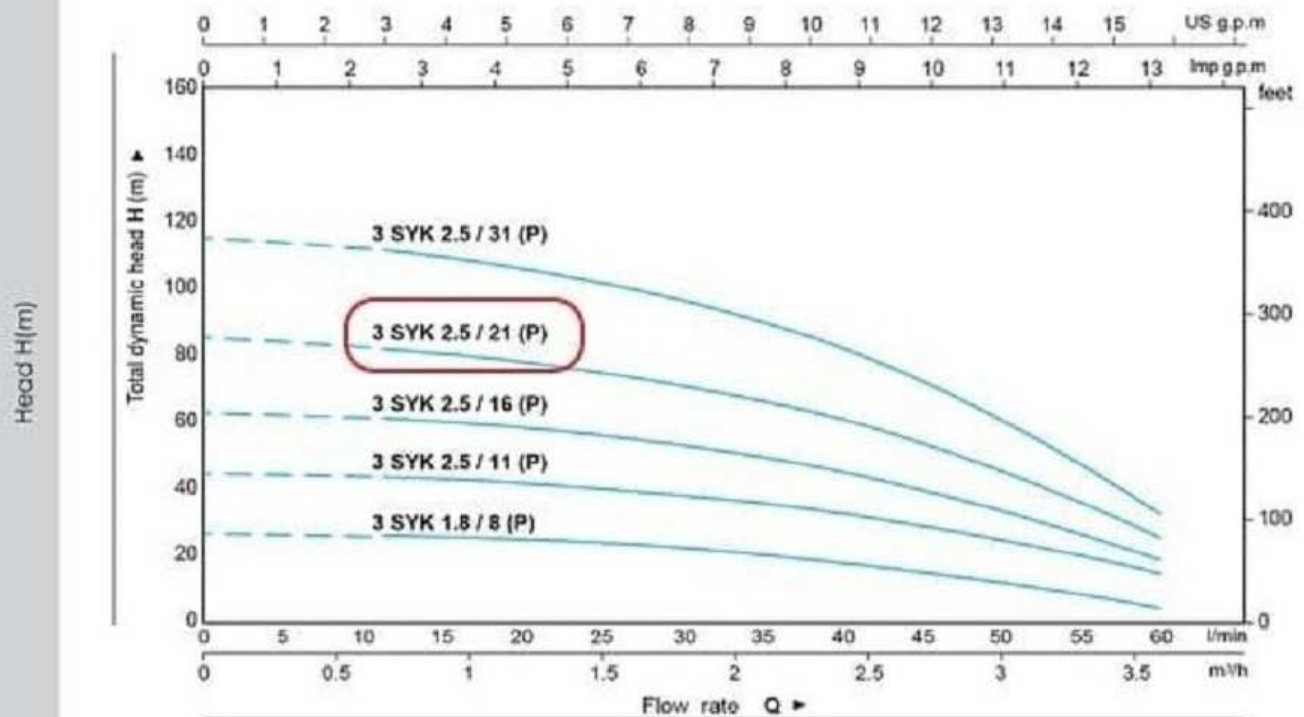

Capacity Q(M³/h)

Performance Data 50 Hz

MODEL	P2		Pipa Diameter Output	DELIVERY													
	KW	HP		n ≈ 2850 1/min													
1 ~ 160V - 240V				Q	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3.0	3.3	3.6
					0	5	10	15	20	25	30	35	40	45	50	55	60
3 SYK 1.8 / 8 P	0.18	0.25	1"	H(m)	29	29	28	27	20	24	21	17	13	8			
3 SYK 2.5 / 11 P	0.37	0.5	1"		42	41	41	40	39	37	36	33	31	27	23	18	13
3 SYK 2.5 / 16 P	0.55	0.75	1"		63	62	61	60	58	56	53	50	46	41	35	27	20
3 SYK 2.5 / 21 P	0.75	1	1"		84	83	82	80	78	74	71	67	61	54	46	37	27
3 SYK 2.5 / 31 P	1.1	1.5	1"		117	116	114	112	109	104	100	93	86	76	65	51	37

